



DYED WATER TESTING PROCEDURES
OUTFALL SEWERSHED
BALTIMORE CITY PROJECT 1039



The information contained in this manual is not intended to address or account for all situations or circumstances encountered, rather it provides the user with general guidelines of the procedures to be followed for Dyed Water Testing in the Outfall Sewershed

BALTIMORE OUTFALL SEWERSHED
DYED WATER TESTING PROCEDURES
PROJECT 1039
TABLE OF CONTENTS

<u>Section</u>	<u>Page</u>
I. Dyed Water Testing	1
II. Dyed Water Testing Notification Protocol	3
III. Preparation for Testing	3
IV. Field Procedures	4
V. Dyed Water Testing Data Delivery	6
VI. Quality Control Review and Criteria	8

Appendices

Appendix A: Dye Testing Field Map
Appendix B: Dye Testing Database Users Guide
Appendix C: Dye Testing Field Form
Appendix D: Dye Testing Report

I. Dyed Water Testing

Dyed water testing is a cost-effective method of locating and quantifying sources of inflow and infiltration (I/I) in piped conveyance systems.

The principal I/I sources that may be located through dyed water testing include:

- Cracked or broken mainline sewer pipes
- Leaking manholes
- Illicit connections to sanitary sewers (downspouts, area drains, driveway drains, etc.)
- Cross-connections between storm and sanitary sewers

Dyed water testing is a technique used to determine if one or more of the above sources is contributing I/I to the sanitary sewer system. It is also a verification test of potential I/I sources that are typically identified first through manhole inspections, CCTV inspections, or smoke testing.

Different types of dyed water testing can be utilized to confirm sources of clear water in the sanitary sewer system.

Dyed Water Test

A dyed water test is used to confirm illicit connections to sanitary sewers (see Figure 1). Sources of inflow such as downspouts, area drains, window well drains, patio drains, stairwell drains, and driveway drains can be detected by smoke testing and verified through a dyed water test. It should be noted that these inflow sources may not always be identified during smoke testing due to clogged drains or trapped building service laterals. Therefore, house-to-house dye-testing surveys may be utilized in conjunction with smoke testing to locate potential illicit connections or to confirm illicit connections identified during smoke testing.

A dyed water test is conducted by placing dye tablets in the suspected source connection and flushing the connection with water to simulate flow of rainwater. If dye is observed in the sanitary sewer downstream of the suspected source, then the source has been confirmed as an improper direct connection to the sanitary sewer and a source of I/I.



Figure 1 - Illegal Downspout Connection

Flooding Dye Test

A flooding dye test is used to confirm direct or indirect connections between storm drains and sanitary sewer pipes. During smoke testing, if smoke is observed basin, storm manhole or other storm drain feature, this observation subsequent dye testing to verify the suspected source (See Figure 2).

A flooding dye test is conducted by flooding the suspected source with dyed water and plugging the storm pipe downstream of the source to trap the dyed water. If dye is observed in sanitary sewer downstream of the suspected source, then the source has been confirmed as being either directly or indirectly connected to the sanitary sewer (see Figure 3).



Figure 2 - Smoke from Catch Basin Reveals Potential Connection Between Storm and Sanitary



Figure 3 - Dye Visible in Downstream Sanitary MH Confirms Connection from Storm to Sanitary

Dyed Water Tracing

Dyed water tracing is typically used in conjunction with a dyed water test or flooding dye test. Dyed water tracing utilizes CCTV inspection equipment to determine the exact location where I/I is entering the sanitary sewer. After dye is observed in a downstream sanitary manhole, a CCTV camera is used to televise the sanitary sewer pipe upstream from that manhole. The CCTV inspector notes any location at which dye enters the sanitary sewer pipe through a defect (see Figures 4 and 5). Dyed water tracing provides more precise information about the source, including its exact location along the pipe segment and the quantity of I/I conveyed.



Figure 4 - Dye Enters Sanitary from Defective Joint
Indirect Connection from Storm Drain

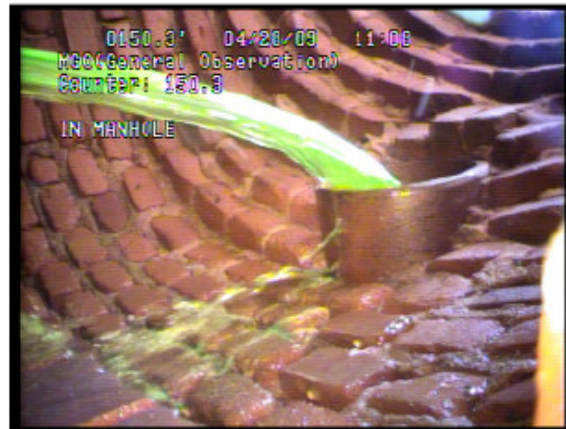


Figure 5 - Dye Enters Sanitary from Overflow Pipe
Direct Connection from Storm Drain

II. Dyed Water Testing Notification Protocol

When access to private property is required to complete a dye test, the Subconsultant must notify the property owner at least four weeks prior to performing any dyed water testing activities. When entering private property, the Subconsultant shall make an effort to notify the property owner and identify themselves.

III. Preparation for Testing

The High Level Sewershed (HLSS) Team will provide the Subconsultant with maps of the sanitary sewer and storm drain systems for the areas to be dye tested. Dye test set-up information will be shown on the maps. These maps will include, at a minimum:

- Sanitary Sewer Pipes with Sewer ID, Flow Direction, and Pipe Size
- Sanitary Manholes with Manhole ID
- Storm Drain Pipes with Pipe Size
- Storm Manholes
- Storm Inlets
- House Connections

- Streets with Street Name
- Parcels with Address Number
- Aerial Photograph as Map Background
- Location(s) where dye should be introduced
- Locations(s) where plugs should be inserted
- Location(s) where sanitary sewer should be checked for dye (at sanitary manholes)

The field crew manager must review these maps prior to the day of testing and ask for clarification from the HLSS Team if necessary. See Appendix A for an example of a dye testing field map as provided by the HLSS Team. In particular, the field crew manager must note the diameters of the storm drains for each test set-up and ensure that the appropriate plugs are available to fit the various storm pipe sizes.

The safety of both the field crew and the general public must be considered when setting up each dye test. If sanitary or storm manholes to be opened are located within a roadway, the field crew must install the appropriate signs, barricades, or other measures to ensure proper traffic control.

When the storm manhole to be flooded is located along a busy street, two or more additional crew members may be needed to assist in moving barricades and directing traffic. All workers must wear approved safety vests at all times, both to alert drivers when they are in the street and to clearly identify all members of the crew to the public, particularly when members must enter private property. All workers must also have proper identification from the Subconsultant. The Subconsultant is responsible for providing maintenance of traffic and any permits required to complete dyed water testing.

IV. Field Procedures

The following field procedures describe the process for successful completion of a flooding dye test. This is the only type of dyed water testing used on the High Level Sewershed project.

Flooding dye tests should only be conducted on days following 2 or more consecutive days of dry weather and when the temperature is greater than 32°F.

For each test, the storm pipe(s) should be plugged as indicated on the provided field maps. Prior to inserting a plug, the field personnel must observe the flow travelling through the pipe and verify that the plug will not cause any sewer backups or discharges. In order to flood a catch basin or storm manhole, the plug is typically inserted in the incoming pipe of the nearest downstream storm manhole. The plugs are used to hold the dyed water within a specified section of storm sewer, allowing the dyed water to potentially travel to the sanitary sewer through either direct or indirect connections.

Once the plugs are inserted, the dye can be introduced into the suspected I/I source. Where possible, the nearest fire hydrant may be used as the source of water to flood the

storm manhole or catch basin. Figures 6 and 7 show some of the equipment used for flooding dye tests.



Figures 6 & 7 – Flooding Dye Test Equipment

Before the dye is introduced, one crew member should be in place at the nearest sanitary manhole downstream of the storm feature to be flooded. This crew member is responsible for monitoring the flow through the manhole and identifying any dyed water. For some test locations, due to the configuration of the sanitary and storm pipes, the maps provided by the HLSS Team indicate that a second downstream sanitary manhole should be checked if dye is not observed at the first monitoring location.

The waiting period for monitoring the sanitary sewer after the introduction of dye will vary, depending on the flow characteristics of the pipes that are being tested. Monitoring should extend for at least one hour after the introduction of dye into the storm manhole or catch basin, in order for a flooding dye test to be considered negative.

As soon as dye is observed in the sanitary sewer, the CCTV inspection crew must be mobilized. The CCTV camera should be placed in the sanitary manhole where the dye was observed. The CCTV crew then shall televise upstream of the manhole where the dye was observed. The CCTV inspection must pause at any location where dye is observed entering the sanitary sewer pipe. The CCTV inspector will code each dye observation per PACP Guidelines. At the same time, another crew member should fill out the field form for the test. If the dye test setup was modified in the field, notes should be added to the field map to indicate all pertinent information about the changes. In addition, a still photo must be taken of each dye observation for use in the dye testing reports. Figures 8 through 11 show still photos of dye entering the sanitary sewer from various sources.

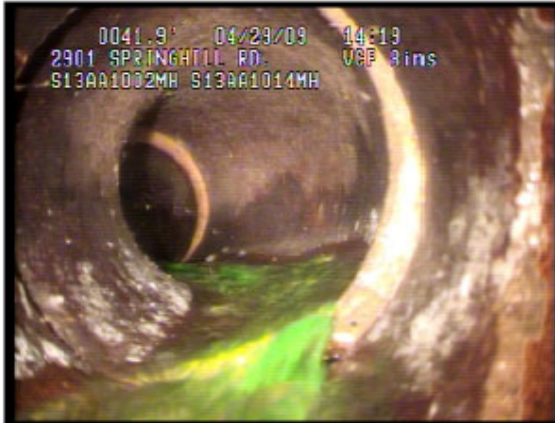


Figure 8 - Dye Enters Sanitary Sewer from Lateral



Figure 9 - Dye Leaks into Manhole from a Defect

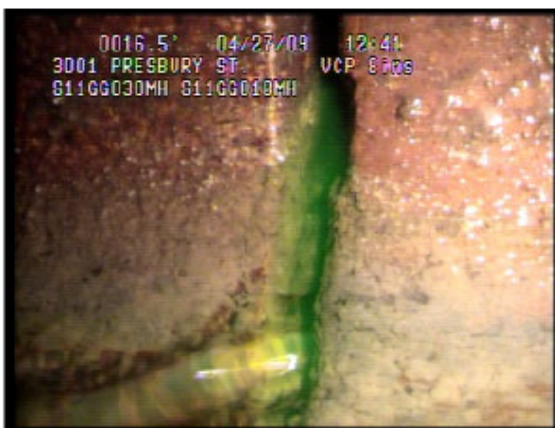


Figure 10 - Dye Enters Sanitary from Defective Joint



Figure 11 - Dye in Pipe from Separated Joint

All dyed water testing activities must be performed in accordance with the EPA SSES Handbook and NASSCO Guidelines and shall follow sound engineering practices.

V. Dyed Water Testing Data Delivery

All field maps, field forms, notes, photographs, CCTV videos and CCTV databases that are accumulated in the field during a dye test should be compiled into a comprehensive report that includes all pertinent testing data. All photographs must be saved in digital JPEG format. All videos must be saved in MPEG 1 format and stored on CD-R discs.

All data entries on the dye testing field forms must be complete and legible. Markups of field maps, including test set-up modifications, should be neat. If any data provided by the HLSS Team on the field maps is missing or incorrect, the Subconsultant shall make note of these instances, which may include unidentified manholes, non-existent manholes, new pipe segments, abandoned pipe segments, incorrect flow arrows and any other observations needed to correctly update the maps.

All notes, photographs and findings that are accumulated in the field must be imported into the Smoke and Dyed Water Testing Database. Hand-written field data that has passed the Subconsultant's QC process will be organized and stored by the Subconsultant

in the Microsoft Access database. See Appendix B for the **Users Guide for the Smoke and Dyed Water Testing Database**. This Access database was designed to facilitate the population of smoke and dye testing information, observation data, and photograph records according to the database schema and specifications outlined in the Smoke and Dyed Water Testing section of the Baltimore Sewer Evaluation Standards (BaSES) Manual (Appendix 6-6).

Dye testing data will be delivered to the HLSS Team weekly. Each delivery must include:

- Smoke and Dyed Water Testing Database, including all dye testing completed to date
- Field Forms
- Field Maps (in color)
- Photographs (divided into subfolders by date of testing)
- CCTV Videos (divided into subfolders by date of testing)
- CCTV Databases (divided into subfolders by date of testing)

The Subconsultant shall review all data prior to any submissions to correct questionable, illegible or incorrect data.

Dye testing field work will be suspended for one week following the first data submission. During this week the data will be reviewed and QC comments will be forwarded to the Subconsultant. The Subconsultant shall modify data collection procedures to address any QC comments. If at any time the data submitted is questionable, incomplete or illegible, the Subconsultant will be asked to verify and correct the data.

If the Subconsultant finds any issues of immediate concern, the HLSS Team should be notified immediately. If the field crew identifies a defect or maintenance issue that requires immediate attention, it must be classified into one of two categories as described below:

- Emergency – any severe defect such as a collapsed pipe segment, major structural defect in a manhole or pipe segment, missing manhole cover or any other defect which may present a hazardous situation or could lead to an improper sewer discharge.
- Priority – any defect or maintenance issue that should be addressed in order to prevent it from escalating to a classification of “emergency.” Examples may include heavy roots, heavy grease, active surcharge, or other similar defects.

In the event that such a defect is identified, the field crew should prepare a map showing the defect location. The field crew must also provide any available field data, including photographs, which will be useful in identifying and locating the defect. All information regarding the defect shall be collected in such a manner that it can be directly imported into the City’s GIS system.

VII. Quality Control Review and Criteria

The Quality Control Review of dye testing data includes review of the field form, field map, Smoke and Dyed Water Testing Database entry, photos, and video for each test. For each observation of dye entering the sanitary sewer pipe, the field crew must fill in a row of the field form. The field form is checked to verify that the following columns are filled out correctly for all observations: defect number, address, source type, location, sector and photo number. All columns on the field form must refer to the location where dye enters the sanitary system. See Appendix C for an example of a properly filled out dye testing field form.

If the dye test setup is modified in the field, the field map must include clear notes describing the changes. In order for a revised test setup to pass QC Review, the field map must at a minimum include an explanation of why the test could not be conducted under the original test setup and a description of how the revised setup was able to test the same storm and sanitary sewer assets for potential cross-connections. All dye testing data in the Smoke and Dyed Water Testing Database is reviewed to confirm that this data matches the hand-written information provided on field forms and field maps. For each dye observation in the database, the observation comment box is checked for the following:


- Location of the dye observation in the format “XX ft. downstream of MH ID”
- PACP coding for the dye observation, including clock positions or other information as required by the PACP Guidelines

See Appendix B for additional guidelines on populating dye test data entries in the database. The QC Review evaluates all dye test data for conformance with these guidelines.

For each dye observation, a still photo must be taken using the CCTV camera. All photos are reviewed to verify that they clearly show the exact location where the dye enters the sanitary sewer pipe. In addition, each video is checked for video quality. A video will fail QC review if it is too dark, the video image is blurry or distorted, or the video has too much light causing a reflection of the pipe.

Appendix A

Dye Testing Field Map

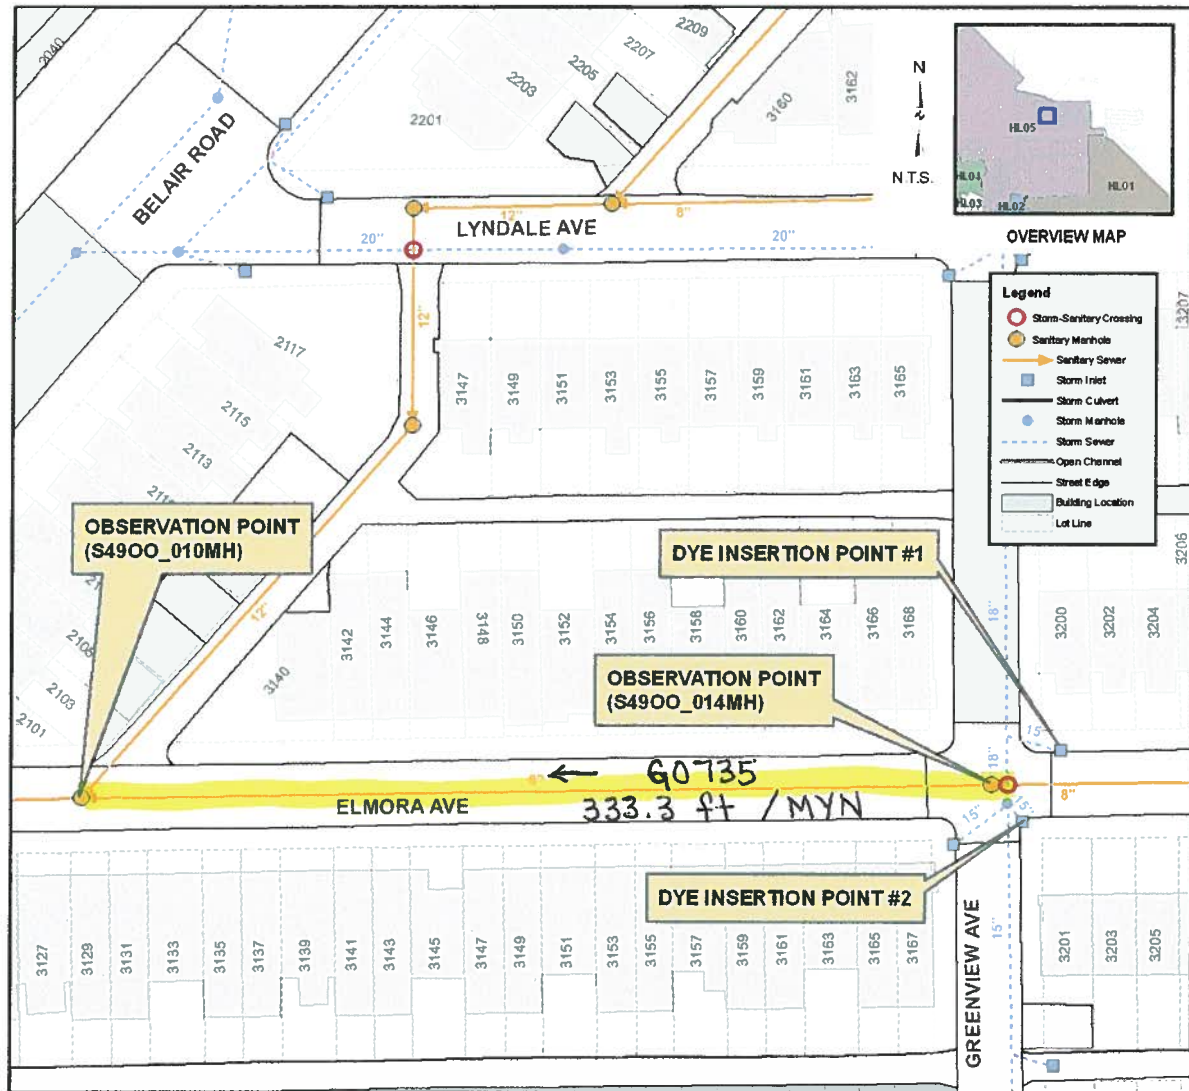

Appendix B

Dye Testing Database Users Guide



SMOKE & DYED WATER TESTING
OUTFALL SEWERSHED
BALTIMORE CITY PROJECT 1039



Microsoft Access Database
Users Guide and Administrator's Manual

Version 07.01



The information contained in this manual is not intended to address or account for all situations or circumstances encountered, rather it provides the user with general guidelines of the procedures to be followed for Smoke Testing in the Outfall Sewershed

BALTIMORE OUTFALL SEWERSHED
SMOKE TESTING PROCEDURES
PROJECT #1039
TABLE OF CONTENTS

<u>Section</u>	<u>Page</u>
I. Introduction	1
II. Opening the Database	1
III. Adding a Test to the Database	2
IV. Adding an Observation	2
V. Adding a Photo	3
a. Naming Observation Photo Image	
b. Viewing Observation Photo Images	
c. Renumbering a Test	
VI. System Prerequisites	6

I. Introduction

The Smoke & Dyed Water Testing Database is designed to facilitate the population of smoke and dye testing information, observation data, and photograph records according to the database schema and specifications outlined in Version 08.03 of the Smoke and Dyed Water Testing section of the Baltimore Sewer Evaluation Standards (BaSES) Manual (Appendix 6-6). The database forms and tables automatically populate the Test ID, Observation ID, Photo ID, and Photo Filename fields per BaSES specifications, allowing the user to focus on entering the data gathered in the field for each smoke test.

All smoke testing data is compiled into one form “frmData_Entry” in the Smoke & Dyed Water Testing database. The “frmData_Entry” includes a header section where general test information is entered as well as the following three tabs: Isolated Sewers, Observations/Photos, and Field Inspection Report. The following table lists the database tables and fields in the Smoke & Dyed Water Testing database along with additional information on how the application manages the field.

Table TEST		
Field	Read-Only	Remark
TEST_ID	Yes	Field is automatically populated when a new record is created
TEST_TYPE	No	User must select the type of test performed from a combo box.
MANHOLE_ID	No	User must enter the manhole ID. The application validates the manhole against the Baltimore wastewater manhole naming convention and informs the user if the entered ID is invalid.
DATE	No	User must enter the date of the test
REPORT	Yes	This field automatically populates as the record is saved
Table OBSERVATION		
Field	Read-Only	Remark
OB_ID	Yes	Field is automatically populated when a new record is created
TEST_ID	Yes	Field is automatically populated when a new record is created
OB_COMMENT	No	User supplied
Table PHOTO		
Field	Read-Only	Remark
PHOTO_ID	Yes	Field is automatically populated when a new record is created
OB_ID	Yes	Field is automatically populated when a new record is created
FILENAME	Yes	Field is automatically populated when a new record is created
PHOTO_COMMENT	No	User supplied

II. Opening the Database

When the database is opened, the main user form is automatically displayed as shown in Error! Reference source not found. The form lists all the currently stored smoke and dyed water tests in the database.

Note: If the column header contains an asterisk, the field is automatically populated and managed by the application and can not be edited by the user

Project: <input type="text"/> Renumber Test					
Starting Test Number: <input type="text"/> Data fields with an asterisk (*) in the column header are automatically created and can not be edited in this form					
	TEST_ID*	TEST_TYPE	MANHOLE_ID	DATE	REPORT*
▶ +	S1039-004	Smoke	S43E__033MH	10/2/2008	S1039-004.pdf
+	S1039-024	Smoke	S45A__011MH	10/8/2008	S1039-024.pdf
+	S1039-085	Smoke	S45A__026MH	10/8/2008	S1039-085.pdf
+	S1039-093	Smoke	S45A__045MH	10/14/2008	S1039-093.pdf
+	S1039-003	Smoke	S45C__016MH	10/2/2008	S1039-003.pdf
+	S1039-078	Smoke	S45C__021MH	10/2/2008	S1039-078.pdf
+	S1039-081	Smoke	S45C__081MH	10/2/2008	S1039-081.pdf
+	S1039-079	Smoke	S45E__006MH	10/2/2008	S1039-079.pdf
+	S1039-011	Smoke	S45E__011MH	10/2/2008	S1039-011.pdf
+	S1039-006	Smoke	S45E__012MH	10/2/2008	S1039-006.pdf
+	S1039-005	Smoke	S45E__022MH	10/2/2008	S1039-005.pdf
+	S1039-082	Smoke	S45E__035MH	10/2/2008	S1039-082.pdf
+	S1039-009	Smoke	S45E__043MH	10/2/2008	S1039-009.pdf
+	S1039-010	Smoke	S45E__045MH	10/2/2008	S1039-010.pdf
+	S1039-002	Smoke	S45G__004MH	10/2/2008	S1039-002.pdf
+	S1039-028	Smoke	S47A__006MH	10/8/2008	S1039-028.pdf
+	S1039-020	Smoke	S47A__008MH	10/8/2008	S1039-020.pdf
+	S1039-023	Smoke	S47A__021MH	10/8/2008	S1039-023.pdf
+	S1039-022	Smoke	S47A__029MH	10/8/2008	S1039-022.pdf

Figure 1 - Main Database User Form

III. Adding a Test to the Database

Before you may enter a new test to the database you must fill in the Project combo box and Starting Test Number textbox fields in the form's header.

Clicking the Project combo box will display a list of all the Baltimore City sewershed projects. Select the appropriate project.

In the Starting Test Number textbox enter the number from which the application will start assigning new test numbers. For a group of sequential tests, this control should only need to be set once. The application will start at this number and count upwards until it finds an unused test number.

With the above two controls set, you can begin entering data in any of the three user-editable fields: TEST_TYPE, MANHOLE_ID and DATE, on the row for a new record. As soon as you begin typing, you will note that the application fills in the TEST_ID field. The Report field is filled in when the TEST record is saved.

IV. Adding an Observation

Clicking the small plus sign on the left side of the TEST record will open a subdatasheet showing all observations for the specific test selected, as shown in Figure 2.

Note: The Comment field is the only user-editable field in the Observation subdatasheet.

To add a new observation, enter a comment, and the OB_ID field will automatically be populated.

Project: 1039 - Outfall					
Starting Test Number:		Renumber Test	Data fields with an asterisk (*) in the column header are automatically created and can not be edited in this form		
	TEST_ID*	TEST_TYPE	MANHOLE_ID	DATE	REPORT*
+	S1039-004	Smoke	S43E__033MH	10/2/2008	S1039-004.pdf
+	S1039-024	Smoke	S45A__011MH	10/8/2008	S1039-024.pdf
+	S1039-085	Smoke	S45A__026MH	10/8/2008	S1039-085.pdf
+	S1039-093	Smoke	S45A__045MH	10/14/2008	S1039-093.pdf
-	S1039-003	Smoke	S45C__016MH	10/2/2008	S1039-003.pdf
	OB_ID*		Comment		
+	S1039-003-OB01	Clean Out			
+	S1039-003-OB02	Foundation crack			
+	S1039-003-OB03	Catch Basin			
*					
+	S1039-078	Smoke	S45C__021MH	10/2/2008	S1039-078.pdf
+	S1039-081	Smoke	S45C__081MH	10/2/2008	S1039-081.pdf
+	S1039-079	Smoke	S45E__006MH	10/2/2008	S1039-079.pdf
+	S1039-011	Smoke	S45E__011MH	10/2/2008	S1039-011.pdf
+	S1039-006	Smoke	S45E__012MH	10/2/2008	S1039-006.pdf
+	S1039-005	Smoke	S45E__022MH	10/2/2008	S1039-005.pdf
+	S1039-082	Smoke	S45E__036MH	10/2/2008	S1039-082.pdf
+	S1039-009	Smoke	S45E__043MH	10/2/2008	S1039-009.pdf
+	S1039-010	Smoke	S45E__045MH	10/2/2008	S1039-010.pdf

Figure 2 - Observation Records

Note: Observation numbers are assigned sequentially by the application by finding the first observation index number available from 1. This means that the application will “backfill” to populate unused numbers.

For example, if observations 1 through 5 are currently in the database for a particular test and observation #3 is deleted. The next observation added to this test will have an ID index of 3.

V. Adding an Observation Photo Record

Clicking the small plus sign on the left side of the Observation record will open a subform showing all photos for the observation selected, as shown in the figure below.

Project: 1039 - Outfall Renumber Test Starting Test Number: Data fields with an asterisk (*) in the column header are automatically created and can not be edited in this form																																		
TEST_ID*	TEST_TYPE	MANHOLE_ID	DATE	REPORT*																														
+ S1039-004	Smoke	S43E__033MH	10/2/2008	S1039-004.pdf																														
+ S1039-024	Smoke	S45A__011MH	10/8/2008	S1039-024.pdf																														
+ S1039-085	Smoke	S45A__026MH	10/8/2008	S1039-085.pdf																														
+ S1039-093	Smoke	S45A__045MH	10/14/2008	S1039-093.pdf																														
- S1039-003	Smoke	S45C__016MH	10/2/2008	S1039-003.pdf																														
<div style="border: 1px solid black; padding: 5px;"> <table border="1" style="width: 100%;"> <thead> <tr> <th>OB_ID*</th> <th>Comment</th> </tr> </thead> <tbody> <tr> <td>- S1039-003-OB01</td> <td>Clean Out</td> </tr> <tr> <td colspan="2"> <div style="border: 1px solid black; padding: 5px;"> <table border="1" style="width: 100%;"> <thead> <tr> <th>PHOTO_ID*</th> <th>Filename*</th> <th></th> </tr> </thead> <tbody> <tr> <td>S1039-003</td> <td>1039-003-OB01-01.jpg</td> <td> Rename Image View Image </td> </tr> <tr> <td>Comment</td> <td>Clean out</td> <td></td> </tr> <tr> <td>* PHOTO_ID*</td> <td>Filename*</td> <td> Rename Image View Image </td> </tr> <tr> <td>Comment</td> <td></td> <td></td> </tr> </tbody> </table> </div> </td> </tr> <tr> <td colspan="2">Record: 1 of 1</td> </tr> <tr> <td>+ S1039-003-OB02</td> <td>Foundation crack</td> </tr> <tr> <td>+ S1039-003-OB03</td> <td>Catch Basin</td> </tr> <tr> <td>* </td> <td></td> </tr> </tbody> </table> </div>						OB_ID*	Comment	- S1039-003-OB01	Clean Out	<div style="border: 1px solid black; padding: 5px;"> <table border="1" style="width: 100%;"> <thead> <tr> <th>PHOTO_ID*</th> <th>Filename*</th> <th></th> </tr> </thead> <tbody> <tr> <td>S1039-003</td> <td>1039-003-OB01-01.jpg</td> <td> Rename Image View Image </td> </tr> <tr> <td>Comment</td> <td>Clean out</td> <td></td> </tr> <tr> <td>* PHOTO_ID*</td> <td>Filename*</td> <td> Rename Image View Image </td> </tr> <tr> <td>Comment</td> <td></td> <td></td> </tr> </tbody> </table> </div>		PHOTO_ID*	Filename*		S1039-003	1039-003-OB01-01.jpg	Rename Image View Image	Comment	Clean out		* PHOTO_ID*	Filename*	Rename Image View Image	Comment			Record: 1 of 1		+ S1039-003-OB02	Foundation crack	+ S1039-003-OB03	Catch Basin	*	
OB_ID*	Comment																																	
- S1039-003-OB01	Clean Out																																	
<div style="border: 1px solid black; padding: 5px;"> <table border="1" style="width: 100%;"> <thead> <tr> <th>PHOTO_ID*</th> <th>Filename*</th> <th></th> </tr> </thead> <tbody> <tr> <td>S1039-003</td> <td>1039-003-OB01-01.jpg</td> <td> Rename Image View Image </td> </tr> <tr> <td>Comment</td> <td>Clean out</td> <td></td> </tr> <tr> <td>* PHOTO_ID*</td> <td>Filename*</td> <td> Rename Image View Image </td> </tr> <tr> <td>Comment</td> <td></td> <td></td> </tr> </tbody> </table> </div>		PHOTO_ID*	Filename*		S1039-003	1039-003-OB01-01.jpg	Rename Image View Image	Comment	Clean out		* PHOTO_ID*	Filename*	Rename Image View Image	Comment																				
PHOTO_ID*	Filename*																																	
S1039-003	1039-003-OB01-01.jpg	Rename Image View Image																																
Comment	Clean out																																	
* PHOTO_ID*	Filename*	Rename Image View Image																																
Comment																																		
Record: 1 of 1																																		
+ S1039-003-OB02	Foundation crack																																	
+ S1039-003-OB03	Catch Basin																																	
*																																		
+ S1039-078	Smoke	S45C__021MH	10/2/2008	S1039-078.pdf																														
+ S1039-081	Smoke	S45C__081MH	10/2/2008	S1039-081.pdf																														

Figure 3 - Observation Photo Form

Note: The Comment field is the only user-editable field in the Photo subform.

To add a new photo, enter a comment, and the PHOTO_ID and Filename fields will automatically populate.

a. Naming Observation Photo Image Files

The Rename Image button can be used to rename photo files to the proper filename as defined in the BaSES specifications. When this button is clicked, a file browser dialog is displayed allowing the user to select the specific image file associated with this observation photo record as shown in Figure 4. Once an image file is selected, the application will properly rename the file so that it is properly linked to the observation photo record.

Project: 1039 - Outfall Renumber Test

Starting Test Number: Data fields with an asterisk (*) in the column header are automatically created and can not be edited in this form

TEST_ID*	TEST_TYPE	MANHOLE_ID	DATE	REPORT*
+ S1039-004	Smoke	S43E__033MH	10/2/2008	S1039-004.pdf
+ S1039-024	Smoke	S45A__011MH	10/8/2008	S1039-024.pdf
+ S1039-085	Smoke	S45A__026MH	10/8/2008	S1039-085.pdf
+ S1039-093	Smoke	S45A__045MH	10/14/2008	S1039-093.pdf
- S1039-003	Smoke	S45C__016MH	10/2/2008	S1039-003.pdf

OB_ID* Comment

+ S1039-003-OB01 Clean Out

PHOTO_ID* S1039-003 Filename* 1039-003-OB01-01.jpg Rename Image

Comment Clean out View Image

* PHOTO_ID* Filename* Rename Image

Comment View Image

Record: 1 of 1

+ S1039-003-OB02 Foundation crack

+ S1039-003-OB03 Catch Basin

Observation Photo for S1039-003

Look in: Draft

My Recent Documents

Desktop

My Documents

My Computer

My Network Places

S1039-007-OB02-P01.JPG S1039-007-OB15-P01.JPG S1039-008-OB12-P01.JPG

S1039-007-OB03-P01.JPG S1039-008-OB01-P01.JPG S1039-008-OB13-P01.JPG

S1039-007-OB04-P01.JPG S1039-008-OB02-P01.JPG S1039-008-OB14-P01.JPG

S1039-007-OB05-P01.JPG S1039-008-OB03-P01.JPG S1039-008-OB15-P01.JPG

S1039-007-OB06-P01.JPG S1039-008-OB04-P01.JPG S1039-008-OB16-P01.JPG

S1039-007-OB07-P01.JPG S1039-008-OB05-P01.JPG S1039-008-OB17-P01.JPG

S1039-007-OB08-P01.JPG S1039-008-OB06-P01.JPG S1039-008-OB18-P01.JPG

S1039-007-OB09-P01.JPG S1039-008-OB07-P01.JPG S1039-008-OB19-P01.JPG

S1039-007-OB10-P01.JPG S1039-008-OB08-P01.JPG S1039-008-OB20-P01.JPG

S1039-007-OB11-P01.JPG S1039-008-OB09-P01.JPG S1039-009-OB01-P01.JPG

S1039-007-OB12-P01.JPG S1039-008-OB10-P01.JPG S1039-009-OB02-P01.JPG

S1039-007-OB13-P01.JPG S1039-008-OB11-P01.JPG S1039-009-OB03-P01.JPG

S1039-007-OB14-P01.JPG S1039-008-OB11-P02.JPG S1039-009-OB04-P01.JPG

File name: Open

Files of type: Photo (*.jpg) Cancel

☐ Open as read-only

+ S1039-050	Smoke	S47AA__029MH	10/14/2008	S1039-050.pdf
-------------	-------	--------------	------------	---------------

Figure 4 - Selecting an Image File to Rename

b. Viewing Observation Photo Images

The View Image button can be pressed to review currently select observation photo using the computer's default image viewer.

c. Renumbering a Test

The Renumber Test button can be used to modify the name of a selected smoke or dye test. In addition to changing the test name, the utility also updates the children observations and photo data database IDs and renames observation photos and report filenames that are currently linked to the database.

Select a test to renumber and press the Renumber Test button. The application will display the Renumber Test form as shown in Figure 5. The old test index and ID are display in the upper left corner of the form. You can enter a new index value to be used to create a new test ID.

If the Report Folder and Photo Folder are not populated, press the Browse button and select the folder in which the report or photo files exist. If these folder fields are properly set, the application will automatically rename the external report and observation files associated with the renumbered test.

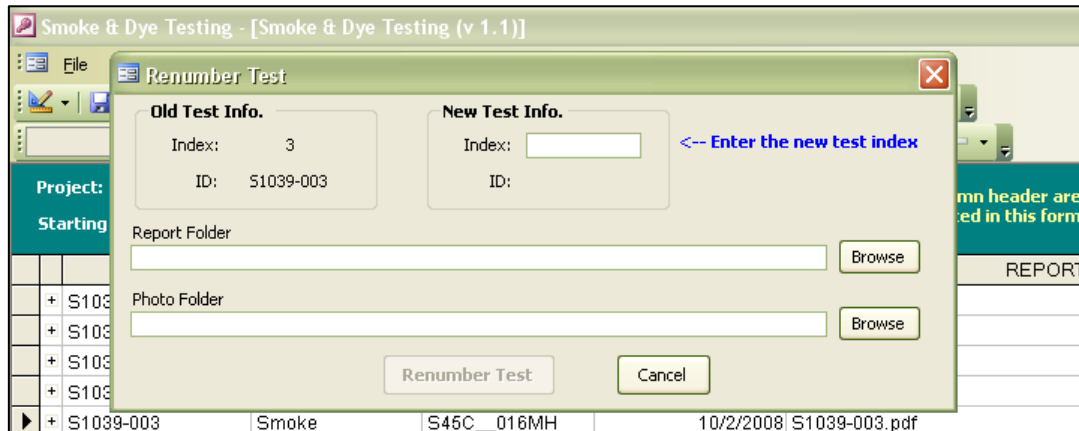


Figure 5 - Renumber Test Form

VI. System Prerequisites

The Smoke & Dye testing database requires the following:

- Microsoft Access 2000 or higher
- Microsoft common dialog ActiveX control 6.0 (comdlg32.ocx)

The common dialog ActiveX control is frequently already installed by other application and usually already installed on must computer. The comdlg32.ocx, along with the following files (comdlg32.dll, comdlg32.oca and comdlg32.dep), are located in Window's System32 folder. If they are not present in the System32 folder, perform the following steps to install and register the ActiveX control:

1. Copy the 4 files to this folder
2. Open up a command window
3. Change the active directory to the system32 folder (i.e. CD C:\Windows\System32)
4. Type: regsvr32 comdlg32.ocx

Appendix C

Dye Testing Field Form

CCTV Surveys List for DB&C

Number of surveys in this list is 19 as of Tuesday, October 20, 2009

Unit of measure: ft

Setup	Date	Street	Start MH	Finish MH	Dir	Size inch	Pre Clean	Media Number	Scheduled Length	Surveyed Length
3	9/28/2009	1752 E. 25TH ST.	S45OO_012MH	S45OO_K01MH	U	8	N	DF-K002	38.2	134.4
4	9/28/2009	1752 E. 25TH ST.	S45OO_K01MH	S45OO_012MH	D	8	N	DF-K002	38.2	38.2
5	9/29/2009	1840 E NORTH AVE	S45MM_050MH	S45MM_010MH	D	8	N	DF-K002	52.8	8.2
6	9/29/2009	1840 E NORTH AVE	S45MM_010MH	S45MM_050MH	U	8	N	DF-K002	52.8	52.8
7	9/29/2009	1811 N CHESTER ST	S45KK_003MH	S45KK_029MH	U	8	N	DF-K002	90.5	90.5
8	9/29/2009	1811 N CHESTER ST	S45KK_003MH	UNKNOWN	U	18	N	DF-K002	3.1	3.1
728	9/24/2009	3442 RAVENWOOD AVE.	S51OO_G01MH	S51OO_016MH	D	8	N	DF-G056		54.6
729	9/24/2009	3442 RAVENWOOD AVE.	S51OO_016MH	S51OO_G01MH	U	8	N	DF-G056		0.0
730	9/24/2009	3442 ELMORA AVE.	S51OO_016MH	S51OO_005MH	D	8	N	DF-G056	203.9	203.9
731	9/24/2009	3442 ELMORA AVE.	S51OO_016MH	S51OO_G02MH	U	8	N	DF-G056		25.2
732	9/25/2009	3442 ELMORA AVE.	S51OO_016MH	S51OO_G01MH	U	8	N	DF-G056		70.5
733	9/25/2009	3442 LYNDAL AVE.	S51OO_005MH	S51QQ_003MH	D	8	N	DF-G056		62.5
734	9/28/2009	3444 ELMSLEY AV	S51QQ_003MH	S51QQ_011MH	D	8	N	DF-G056		106.0
735	9/28/2009	3167 ELMORA AVE.	S49OO_014MH	S49OO_010MH	D	8	N	DF-G056	333.3	333.3
736	9/29/2009	1500 EDISON HWY	S53II_004MH	S53II_008MH	D	18	N	DF-G056		0.0
737	9/29/2009	2024 E. BALTIMORE ST.	S45E__002MH	S45E__014MH	D	8	N	DF-G056	249.0	249.0
738	9/30/2009	1500 EDISON HWY	S53II_004MH	S53II_008MH	D	18	N	DF-G056	87.3	87.3
739	9/30/2009	1500 EDISON HWY	S53II_004MH	S53II_008MH	D	18	N	DF-G056		46.6
740	9/30/2009	1500 EDISON HWY	S53II_004MH	S53II_G01MH	U	8	N	DF-G056		0.0
Total Scheduled Length									1,149.1	
Total Length Surveyed										1,566.1

CCTV Surveys List for DB&C

Number of surveys in this list is 8 as of Tuesday, October 20, 2009

Unit of measure: ft

Setup	Date	Street	Start MH	Finish MH	Dir	Size inch	Pre Clean	Media Number	Scheduled Length	Surveyed Length
9	10/1/2009	1705 LIAMPSTEAD CT	S43E__024MH	S43C__018MH	U	8	N	DF-K003	40.9	40.9
10	10/1/2009	1705 LIAMPSTEAD CT	S43C__018MH	S43C__K01MH	U	8	N	DF-K003	27.8	27.8
11	10/1/2009	1999-2040 BELAIR RD	S4900_001MH	S4900_K01MH	U	12	N	DF-K003	61.9	71.4
12	10/1/2009	1999-2040 BELAIR RD	S4900_K01MH	S4900_001MH	D	12	N	DF-K003	61.9	61.9
741	10/1/2009	2041 E. FAYETTE	S45C__056MH	S45C__076MH	U	8	N	DF-G057		0.0
742	10/5/2009	2041 E. FAYETTE ST.	S45C__076MH	S45C__056MH	D	8	J	DF-G057		28.7
743	10/5/2009	1950 E. FAYETTE ST.	S45C__071MH	S45C__075MH	U	8	J	DF-G057		0.0
744	10/5/2009	3443 ELMLEY AVE.	S51QQ_003MH	S51OO_005MH	U	8	J	DF-G057		12.9
Total Scheduled Length									192.5	
Total Length Surveyed										243.6

Appendix D

Dye Testing Report